


# motorsport rally range **KDC720**

Ø184 (7.25") Rally driven plates

## Specifications

Spline Size	Ø	No. of Teeth	4 Pad - A Type 11.7mm long hub	6 Pad 15.0mm long hub	New Thickness
1.125" × 10T	28.58	10	KDC720406X010	-	7.2
29 × 10T	29	10	KDC720410X010	KDC720610X010	7.2
25 × 14T	25	14	-	KDC720612X010	7.2
21 × 18T	21	18	KDC720417X010	KDC720617X010	7.2
0.875" × 20T	22.2	20	KDC720425X010	KDC720625X010	7.2
24.25 × 21T	24.25	21	KDC720427X010	KDC720627X010	7.2
1.0" × 22T	25.4	22	KDC720429X010	KDC720629X010	7.2
1.0" × 23T	25.4	23	KDC720430X010	KDC720630X010	7.2
20.5 × 24T	20.5	24	-	KDC720632X010	7.2
1.0" × 24T	25.4	24	KDC720433X010	KDC720633X010	7.2
25.8 × 24T	25.8	24	-	KDC720686X010	7.2
22 × 26T	22	26	KDC720435X010	KDC720635X010	7.2
1 5/32" × 26T	29.36	26	-	KDC720636X010	7.2

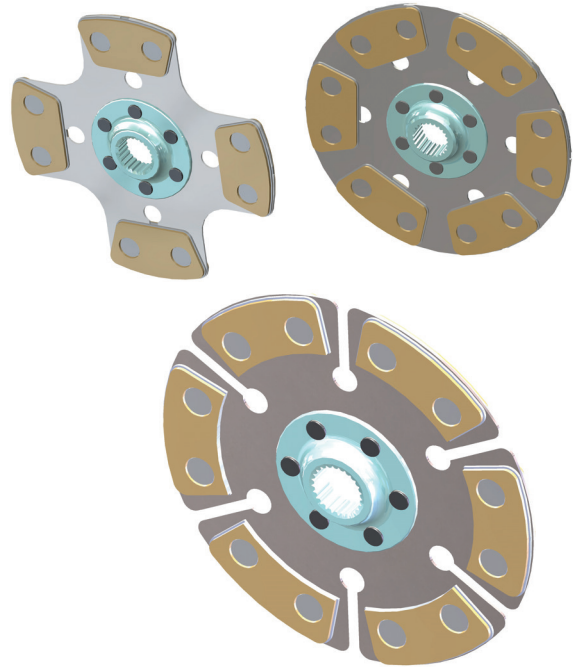

## Applications

General Rally and Circuit use.

## Key features and benefits

- Optimised design.
- Optimised hub length for low inertia with minimum hub wear.
- Cerametallic friction material for high energy capacity and increased wear rate.
- Interchangeable with other manufacturers' product.
- Various hub configurations available to provide increased hub to crank bolt clearance.
- 4 and 6 pad options available.

## Driven Plates for low height cover S2000 applications

Spline Size	Ø	No. of Teeth	6 Pad - A Type 11.7mm long hub	6 Pad - A Type 9.6mm long hub	New Thickness
1.0" 23T	25.4	23	KDC720630X006	KDC720630X007	6.8
25.8 × 24T	25.8	24	KDC720686X002	-	6.8

## Installation dimensions

